

539,680

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number  
**WO 2004/054768 A1**

(51) International Patent Classification<sup>7</sup>: **B27L 1/04**

(21) International Application Number:  
PCT/FI2003/000968

(22) International Filing Date:  
17 December 2003 (17.12.2003)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:  
20025065 18 December 2002 (18.12.2002) FI

(71) Applicant (for all designated States except US): AN-  
DRITZ OY [FI/FI]; Tammasaarentie 1, FIN-00180  
Helsinki (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): NIINIMÄKI, Jouko  
[FI/FI]; Kalhutie 17 B, FIN-90230 Oulu (FI).

(74) Agent: LEITZINGER OY; Tammasaarenkatu 1, FIN-  
00180 Helsinki (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,  
CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE  
(utility model), DE, DK (utility model), DK, DM, DZ, EC,  
EE (utility model), EE, EG, ES, FI (utility model), FI, GB,  
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL,  
PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (util-  
ity model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG,  
US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: A METHOD FOR OPTIMIZING THE DEBARKING RESULT OF LOGS DEBARKED IN A DEBARKING DRUM

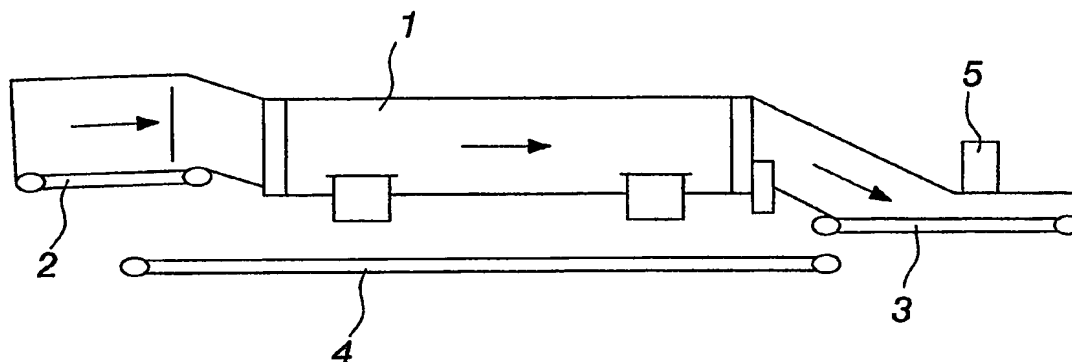

(57) Abstract: A method for optimizing the debarking result of logs debarked in a debarking drum, especially logs of mutually approximately the same size and of the same wood species, in such a way that wood losses remain as small as possible at the same time as the control values of the debarking drum are selected to be such that the debarking degree of the logs debarked in the debarking drum is of the desired order. The amount of bark remaining on the logs in the log flow discharged from the debarking drum and the amount of damaged logs in the said log flow are measured. At the same time as the amount of bark remaining on the logs is maintained at a desired level, the amount of damaged logs is kept as low as possible in such a way that the filling degree of the debarking drum is lowered whenever the amount of damaged logs is observed to increase.

WO 2004/054768 A1